

DU190 COMPRESSOR



Engine Pulley Protector (other side)

A protective steel plate is installed to protect and prevent accidental contact to the engine pulley during operations.



Rain Shield

Rain shield is designed right above the canopy doors to minimise potential rainwater penetration.




Lockable Diesel Deck Filler

Lockable diesel deck filler is designed to prevent unauthorised access to the diesel tank and protect against fuel theft.



Battery Protection Cover (other side)

A dedicated protection cover is installed above the battery to prevent any form of fluid contact – safeguard from potential discharge and hazards.

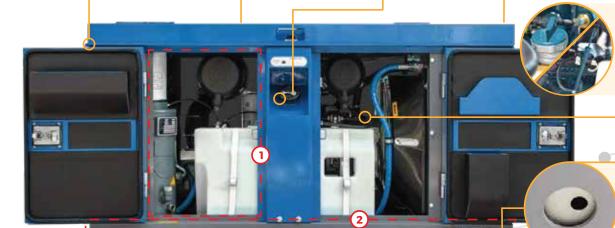

Extended Oil Filler /Dipstick

The Oil Filler and Dipstick has been extended for easier access and better serviceability.

Drainage Holes

Drainage holes are constructed below as a conduit for rainwater to follow through the exhaust pipe and out of the compressor without fail.

Specification

Model	DU190
Engine Model	Kubota V1505T
Engine Output	32.5 kW
Engine Speed	3000 rpm
Actual Free Air Delivery	4.87 m³/ min ; 100 psi
Rated Operating Pressure	0.7 Mpa
Dry Weight	680 kg

Key Benefits



Weather Proof



Enviromental Friendly



Efficient Maintenance



Safety Protection





Great Versatility

